

## Gates Power Cutter 208

**Product Number:** 7480-6609

### Effortless Straight Cuts Every Time

- Clear face shield for added safety.
- Powerful high torque, 4.5 horsepower peak motor that makes cutting faster and easier.
- Includes scalloped, 12" blade to dissipate heat, reducing friction for clean, faster cuts up to 1-1/4" I.D.
- Optional abrasive blade for continuous use with 1-1/4" I.D and larger spiral-wire reinforced hose.
- Safely cuts two and four-wire hoses through 2", six-wire hoses through 1-1/4".
- Reversible blade can be sharpened; removal and installation is easy.
- Cuts small 3/16" I.D. hose and handles the tough jobs, including 2" I.D. spiral wire hoses.\*
- Easy to use, front face plate with moveable pins holds hose securely for a clean straight cut.
- Sturdy blade guard shields blade for safety.
- Permanent mounting brackets (included) to attach saw to table.

\*Optional abrasive blade preferred for cutting spiral-wire hose, larger than 1-1/4" I.D.

#### CUTTER SPECIFICATIONS


**Shaft/Arbor Hole Diameter:** 1"

**Power Source:** 4.5 HP Peak, 115/50/60 Hz, 20 Amps.

**No Load Speed:** 3,500 rpm

**Dimensions:** 22-1/2" wide by 18-1/4" length by 23-1/2" high

**Weight:** 65 lbs.

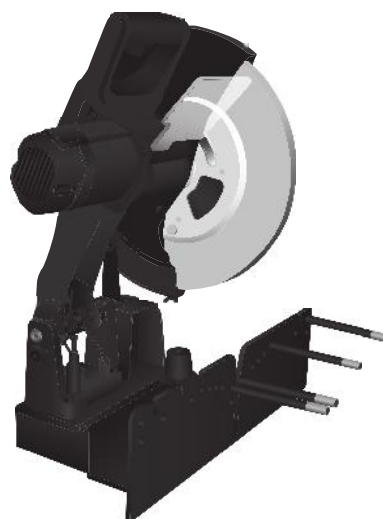

**Caution:** Keep blade sharp. Heat generated by a dull blade can damage steel and flare the hose.

#### BLADE SPECIFICATIONS

**Blade Dimensions:** 12" by 1/8"

#### Scalloped Replacement

**Product Number:** 7482-0983

#### Optional Abrasive

**Product Number:** 7482-0426

## Gates Hose Cutter Model 6-32

For six-wire spiral and two-wire braid hose through 2" I.D.

**Product Number:** 7480-6597

### Clean Easy Cuts – Safe Operation

#### FEATURES:

- Cuts up to 2" I.D. two-wire braid through six-spiral reinforced hose.
- Reversible 10" scalloped-edge, high-speed steel blade with 3/4" bore, can be sharpened.
- Radius hose feed into blade for safety and reduced friction.
- Inner blade guard for safe operation.
- **Includes Coolant Spray System Kit** for reduced heat in high-capacity cutting applications (recommended for multi-braid and spiral reinforced hose). Kit includes reservoir, spray nozzle and mounting hardware.
- Power cord not included.



#### SPECIFICATIONS

**Power Source:** 3 HP (5.2 HP Peak), Single phase, 230V, 60 Hz., 20 Amp motor

**Dimensions:** 22" wide by 42" length by 24" high

**Weight:** 215 lbs.

#### Replacement Blade

**Product Number:** 7482-1329

EQUIPMENT
HOSE/CPLG. SELECTION
G8K COUPLINGS
GLOBALSPIRAL COUPLINGS
PCM/PCS FERRULES
MEGACRIMP COUPLINGS
STAINLESS STEEL
POWER CRIMP COUPLINGS
LOC, GL AND GLP COUPLINGS
POLARSEAL COUPLINGS
POLARSEAL II COUPLINGS
C14 COUPLINGS
PCTS THERMO-PLASTIC COUPLINGS
FIELD ATTACHABLE G1 AND G2 COUPLINGS
FIELD ATTACHABLE C5 AND C5E COUPLINGS
SURELOK AIR BRAKE COUPLINGS
ADAPTERS
QUICK DISCONNECT COUPLERS
LIVE SWIVEL
BALL VALVES
ACCESSORIES
EQUIPMENT AND PARTS



Powering Progress.

[gates.com/hydraulics](http://gates.com/hydraulics)

B11